

NEW MARS P-2532 from Gear Box Pro, is the latest Range Plug Power Distribution solution for A/V, DJ's & Live Sound. It remotely connects your Rack PDU's to Generators, Hotel & Banquet Halls equipped with 50A Range Receptacle(s). The Range Plug provides 6 circuits; two independent double 30A circuits on NEMA L14-30R outlets to supply two Amp Rack PDU's plus two 20A circuits on a split T-slot Duplex outlet to supply FOH & Side Monitor Mix power. (Rack Mounts Optional)

## Applications

### Audio

Main PA  
FOH  
Monitor Mix

### Lighting

LED moving heads

### Generator Power

## Users

Banquet Halls  
Hotels  
University Venues  
A/V Presentations  
Live Sound  
Wedding Bands  
DJs

## Description

The MARS Products were developed to provide the highest rack density solution for concert amplifier racks. They are completely modular in design with removable rack ears, reverse mountable to each other and rubber bumpers for independent use outside the rack.

Constructed of stainless steel, 2U high, 1/2 of 19" rack width and 10" deep.


In a 4U rack space you can mount 4 modules. Signal distribution, Speaker distribution and double single phase, double three phase or one of each. No more changing rack power distro's to suit the Venue's power configuration, just plug your amplifiers into the appropriate module.

## OTHER M.A.R.S PRODUCTS

There are 15 single phase P-Series PDU's, 12 three phase P-Series PDU's, 4 A-Series Multi-Pin/XLR Audio Distribution modules and 6 A-Series Speaker

distribution modules to assemble your amp rack interconnect solution. With this many to choose from, chances are you will never consider custom building again.

Front View

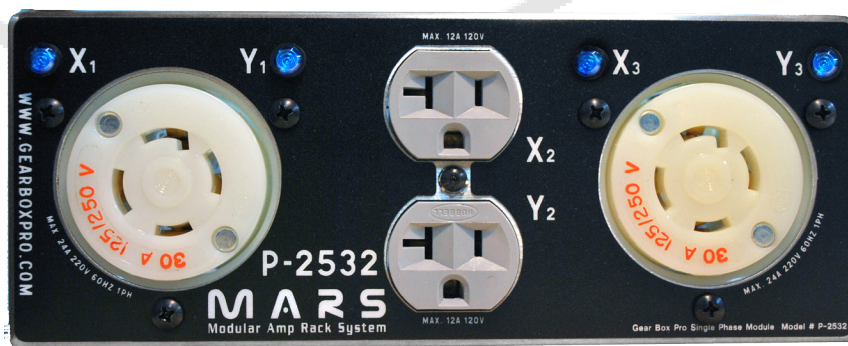

MARS modularity makes it easy to upgrade racks when interconnect technology changes.

For more information about the MARS Audio and Power products, contact one of our consultative sales personnel at sales@gearboxpro.com.

**Technical Specs**

Inputs:  
1x 50 Amp Molded Range-Plug 4ft long  
Outputs:  
2x 30-Amp NEMA L14-30R  
1x 20-Amp Hubbell® Edison U-Ground (split) T-Slot Duplex Receptacle

Electrical Specs:  
Total maximum load of 40-Amps, 120 V, 60hz, Single Phase  
Electrically approved by special inspection for North America

Dimensions: (LWH)  
10" x 8-5/8" x 3.5"

Weight:  
12lb / 5.5kg

**Features**

- 2 modules fit into a 2u 19" rackspace
- Blank extended rack ear for single module rack mounting
- Stainless steel construction for positive grounding
- Mounting orientation is completely ambidextrous

Rear View



Gear Box Pro reserves the right to change the technical specifications without notice.

\*To purchase M.A.R.S. products or to view our Dealer List for your local area go to our website (see below)

SKU: 42532

[www.gearboxpro.com](http://www.gearboxpro.com)

Preliminary